

# KL-15 | KL-07

Rugged & Portable Digital Level



## Simple, Fast and Accurate

- 1.5mm precision for KL-15/ 0.7mm precision for KL-07
- 105m distance measurement
- Magnetic damping Compensator
- Onboard measurement and recording programs
- 20,000-point memory & SD card slot (KL-07)
- Ideal for construction and general applications


## User friendly & Practical

**Automatic reading:** Minimize human errors, no more misreading

**Higher Accuracy:** Averaging mode for more accurate results

**Rapidity:** Shorten the measuring time by a half


**Auto Save:** Internal memory storage or SD card memory optional, paperless working.

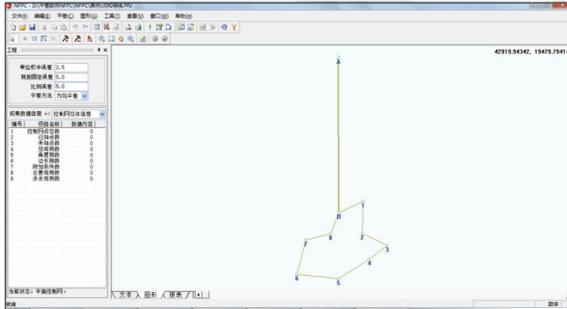

### Powerful Post-processing Software

It contains adjustment routines for dynamic adjustment of horizontal & vertical control network and angle & direction adjustment.

Easily zoom in or out to see the overall data in graphic.

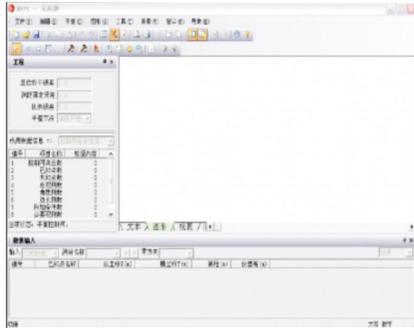

### Seamless Transfer with Various Data Formats

Station	SD_Length	AccSightDist	Length	SD_Diff	d	HeightDiff
1	35.2335	89.9155	0.1135	0.1135		
2	54.682	89.9155	-0.262	-0.1485		
3	48.915	138.8395	-0.937	-1.0855		
4	35.988	173.9195	-0.458	-1.5435		
5	37.1895	211.1080	-0.6915	-2.2350		
6	55.139	266.2470	0.731	-1.5040		
1	55.1430	55.1430	-0.7300	-0.7300		
2	37.1975	92.3405	0.5835	-0.1465		
3	35.1025	127.4430	0.4855	0.3390		
4	48.9055	176.3485	1.0975	1.4365		
5	54.6470	230.9955	0.2240	1.6655		
6	35.2170	266.2125	-0.3250	1.3345		

### Precision Analysis & Report

The KL Data Download & Processor Software, makes the field work easier to display the complex leveling tasks.

## Specifications

Item		KL-07	KL-15
Height Accuracy (standard deviation for 1km double run leveling)	Digital Reading	0.7mm	1.5mm
	Optical Reading	2.0mm	
Distance Accuracy	Digital Reading	D≤10m:10mm;D>10m:D*0.001	
Distance Range	Digital Reading	1.5m~105m	
Minimum Display	HD	0.1mm/1mm	
	Distance	0.1/1cm	
Measuring Time		within 3s in normal condition	
Telescope	Magnification	32X	
	Resolving Power	3"	
	Field of View	1°30'	
	Multiple Constant	100	
	Additive Constant	0	
Compensator	Type	magnetic-damping	
	Range	>±12'	
	Accuracy	0.30"/1'	0.50"/1'
Data Storage	Storage	16MB, 20,000 points	
	Point Name	increasing/decreasing/customized	increasing
	Connection	Mini-USB	
	External Storage	micro SD Card	not applicable
Circular vial Accuracy		8'/2mm	
Display		160*64dpi LCD with illumination	128*32dpi LCD with illumination
Working Temperature		-20°C~50°C	
Storage Temperature		-40°C~70°C	
Battery Life		18 hours	
Dimension		230mmX150mmX210mm	
Weight		2.5kg	
IP Standard		IP65	

Dealer Info

**KOLIDA**

Professional's Choice

**GUANGDONG KOLIDA INSTRUMENT CO., LTD.**

Add: 7/F, South Geo-information Industrial Park, No.39 Si Cheng Road, Tian He IBD, Guangzhou 510663, China

Tel: +86-20-22139033 Fax: +86-20-22139032

Email: export@kolidainstrument.com

http://www.kolidainstrument.com